



Verizon Ellipsis 7 Speaker Replacement

Replace the front facing speakers in the Verizon Ellipsis 7.

Written By: Charles Gorbett



INTRODUCTION

This guide will show you how to replace the front facing speakers on the Verizon Ellipsis 7. This is important to continue to use the Verizon Ellipsis 7 without using headphones. One of the hazards of this process is the potential to break or lose components of your device if not done properly.



TOOLS:


- [Tweezers](#) (1)
- [iFixit Opening Tools](#) (1)
- [Phillips #00 Screwdriver](#) (1)



PARTS:

- [Verizon Ellipsis 7 Replacement Speakers](#) (1)

Step 1 — Charging Port

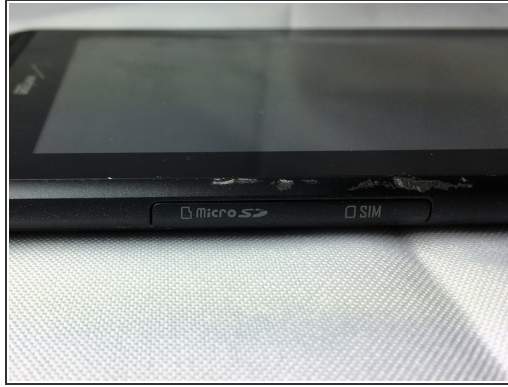


- Hold down the power button until the screen goes black to turn off the device.
- Remove the SIM card from the device to prevent damage.
 - To remove the SIM card, open the SIM card cover on the side of the device.
 - Push SIM card in and pull it out after hearing a click.


Step 2



- Take off the back panel.
- Pry open the back cover carefully with a plastic opening tool.
- Use the opening tool to disconnect the cover completely. Do not attempt to pry the back cover off with your hands.

 Be sure to pry open all sides of the device. Attempting to take off the back cover when part of it is attached may snap the cover.



Step 3

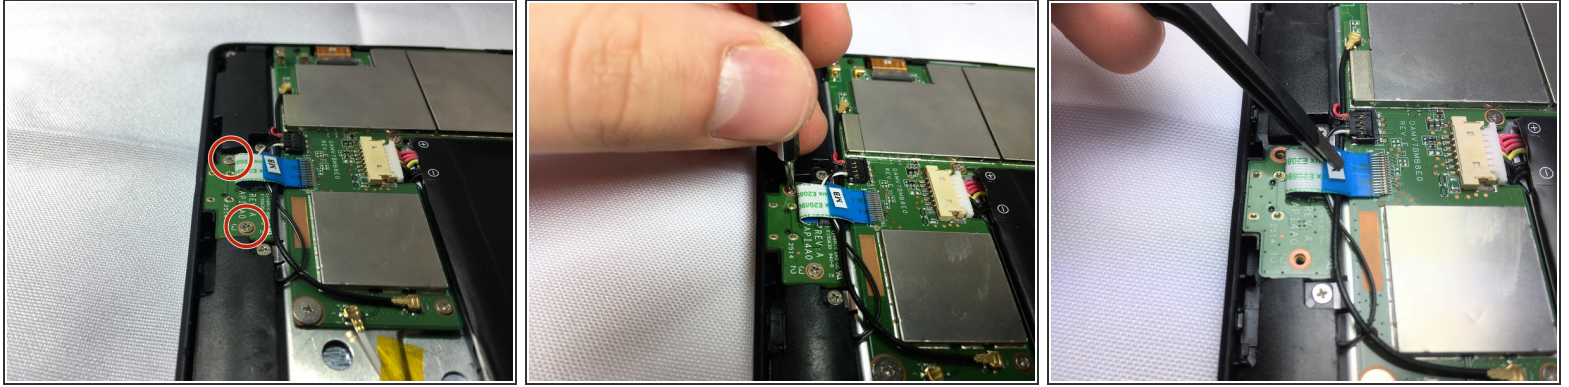

- Remove the charging (micro-USB) port.
 - Unscrew the indicated screws using the Phillips #00 screwdriver.
 - ⓘ The screws shown in the picture are the more common 4.76 mm.
- Disconnect the ribbon cable connecting the charging port board to the motherboard using tweezers.
 - Use the tweezers to grab the sides of black, plastic connector. Do not grab from the wires or try to wedge it out from the bottom.



⚠ Be extremely careful when disconnecting the ribbon cable. It is very delicate.

Step 4

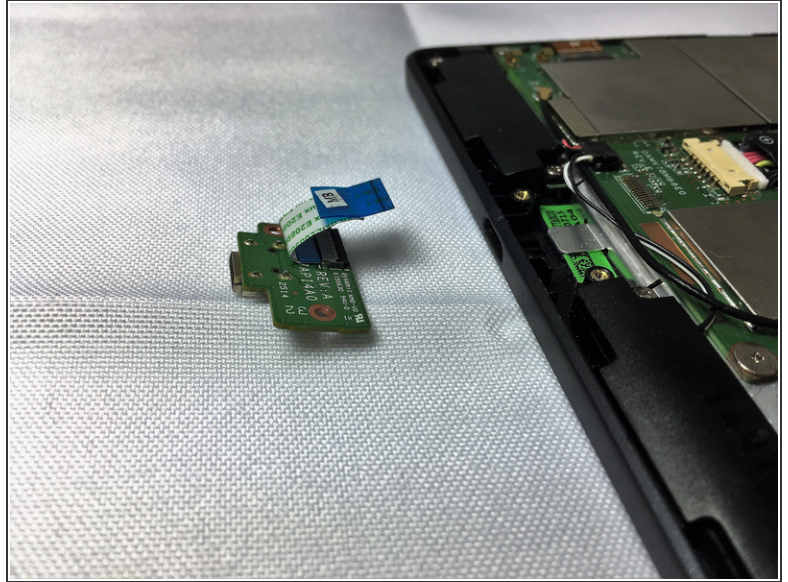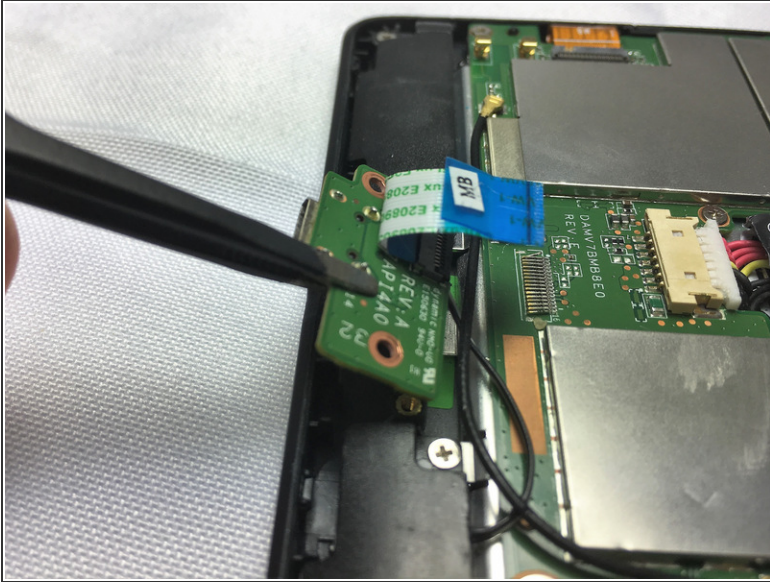


- Remove the charging port board from the phone using tweezers.
 - Place the replacement charging port into the phone.
- ⚠ Be cautious when replacing the ribbon cable onto the new charging port board.

Step 5 — Speaker

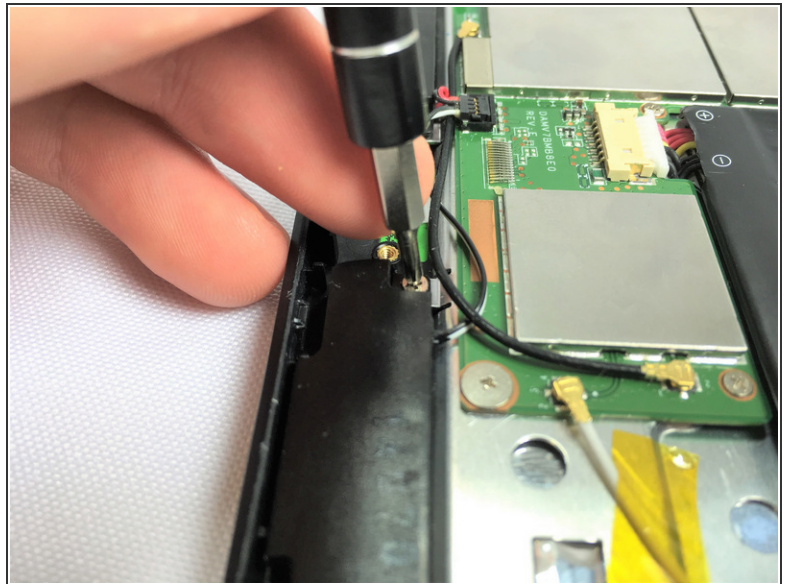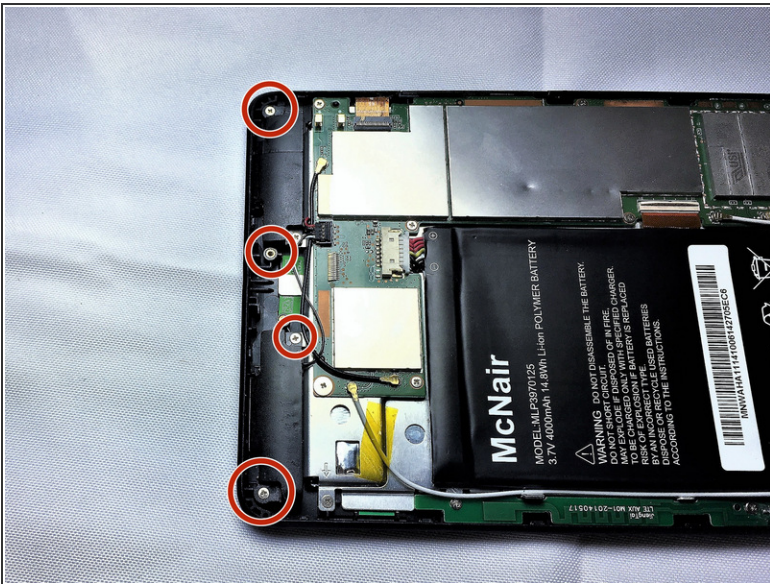

- Remove 2 screws from each speaker, 4 screws in total, using a Phillips #00 screwdriver.
- ⓘ The screws shown in the picture are the more common 4.76 mm.

Step 6

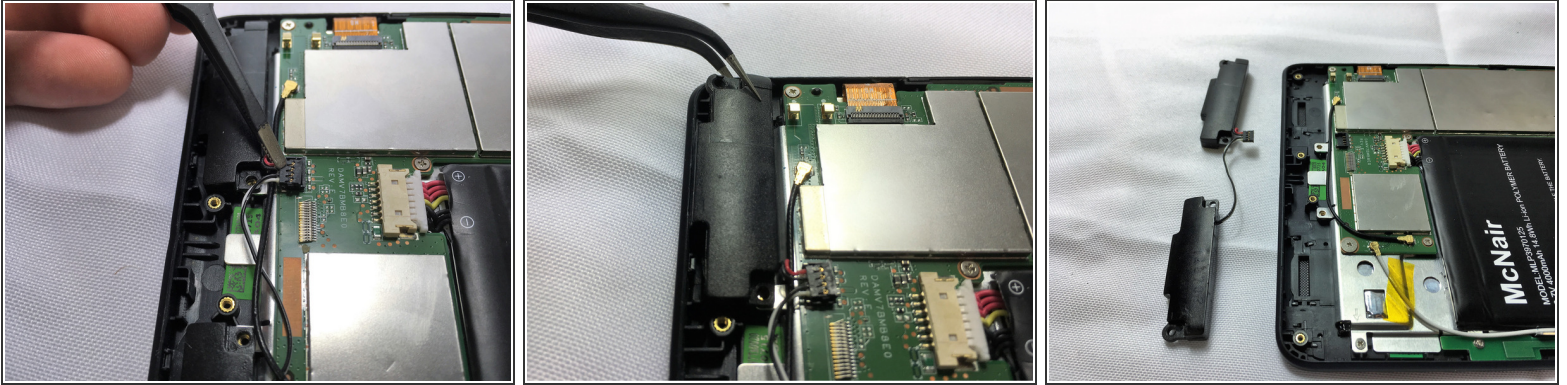

- Using tweezers carefully lift the connector up to disconnect it from the motherboard.
- Using tweezers carefully pull the speakers up and out of device.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-09-04 12:52:01 AM.